


Sun L Trunking System




Dimensions

Available length; 610, 1210, 2410

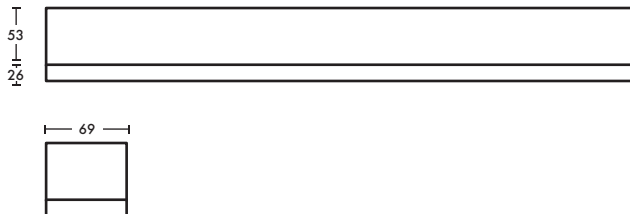

measurements in mm



Colours also
available



Any RAL colour
(special request)

IP20

RoHS

CE

DALI Dimming
Available

Product details

Other wattages available, please contact us for details.

System Power	22W (610mm module)			41W (1210mm module)			84W (2410mm module)		
CCT	3000K	3500K	4000K	3000K	3500K	4000K	3000K	3500K	4000K
Luminaire Lumens at CRI 85*	1375	1396	1437	2750	2792	2875	5501	5584	5749
Luminaire Lumens at CRI 90+*	1129	1149	1191	2259	2299	2381	4518	4597	4763
LED Efficacy @ CRI 85	62.5 lm/W	63.4 lm/W	65.3 lm/W	67.1 lm/W	68.1 lm/W	70.1 lm/W	65.5 lm/W	66.5 lm/W	68.4 lm/W
LED Efficacy @ CRI 90+	51.3 lm/W	52.2 lm/W	54.1 lm/W	55.1 lm/W	56.1 lm/W	58.1 lm/W	53.8 lm/W	54.7 lm/W	56.7 lm/W
Optics	Medium, wide, asymmetric, double asymmetric								

*Lumen values may vary by +/- 10%

For more information visit shoplight.lighting